



PROSTAFF 1000

LASER RANGEFINDER

NEW FOR 2019

**ACCURACY,
CONSISTENCY & VALUE**

NEW PROSTAFF 1000



MULTILAYER COATING

Multilayer coating is applied to one or more lens and prism surfaces.



LONG EYE RELIEF

Provides 15mm or more of eye relief. Perfect for eyeglass wearers.



TRU TARGET

Technology that allows you to switch between First Target and Distant Target modes.

- HIGH QUALITY 6X MONOCULAR
- AUTOMATIC CONTINUOUS MEASUREMENT FOR UP TO FOUR SECONDS IF SINGLE MEASUREMENT FAILS
- PRESS AND HOLD DOWN THE POWER BUTTON TO ACTIVATE THE CONTINUOUS MEASUREMENT FUNCTION (UP TO APPROXIMATELY EIGHT SECONDS)
- COMPACT SIZE FITS IN POCKET
- RAINPROOF—JIS/IEC PROTECTION CLASS 4 (IPX4) EQUIVALENT

ACCURACY, CONSISTENCY & VALUE

The PROSTAFF 1000 6x20 Laser Rangefinder puts a solid 1,000-yard maximum ranging capability into your hand, together with compact ergonomics that will fit your pocket. The 6x optical system makes seeing—and ranging—deer out to 600 yards a reality, while the Tru-Target system allows you to select either First Target or Distant Target Priority. Weather resistant/ rainproof construction.

TRU-TARGET TECHNOLOGY ENABLES YOU TO CHOOSE BETWEEN TWO DIFFERENT RANGING MODES, DEPENDING ON THE SITUATION.



First Target Priority Mode

provides the exact distance to the closest object among a group of targets being measured. In this mode, you can easily range an object as small as a fence post.



Distant Target Priority Mode

displays the range of the farthest target among a group of targets measured. This feature is especially useful if the subject is located behind tall grass or brush.

SPECIFICATIONS

PRODUCT NUMBER	16664
MAG. X OBJ. DIAMETER	6x20
EYE RELIEF (mm)	16.7
REAL ANGULAR FOV / FOV @ 100 YDS (FT)	6.0° / 31.4
MEASUREMENT RANGE* (YDS)	6-1,000
MAX RANGE (REFLECTIVE)* (YDS)	1,000
MAX RANGE (TREE)* (YDS)	800
MAX RANGE (DEER)* (YDS)	600
WEIGHT (W/O BATTERIES) (OZ)	4.6
SIZE (LxHxW) (IN)	3.6 x 2.9 x 1.5
INCREMENT READING (YDS)	1.0
EXIT PUPIL (MM)	3.3
DIOPTER ADJUSTMENT	±4 m-1
POWER SOURCE	1 CR2 LITHIUM
ACCURACY** (actual distance in yds)	±1.00m/yd. (shorter than 100m/yd.) ±2.00m/yd. (100m/yd. and over)
VIEWFINDER DISPLAY	m/YD
LASER CLASSIFICATION	IEC60825-1: Class 1M/Laser Product FDA/21 CFR Part 1040.10:Class 1 Laser Product
ELECTROMAGNETIC COMPATIBILITY	FCC Part15 SubPartB class B, EU:EMC directive, ICES-003
ENVIRONMENT	RoHS, WEEE

* Under Nikon's measurement conditions and reference value.

**Under Nikon's measurement conditions.

The specifications of the product may not be achieved depending on the target object's shape, surface texture and nature, and/or weather conditions.



5-YEAR RANGEFINDER LIMITED WARRANTY:

If any Nikon rangefinder is found to have defects in workmanship or materials, we will, at our option, repair or replace it at no charge for a period of 5 years from date of purchase. Please see warranty card for limitations and exclusions.

For details, visit NikonSportOptics.com.

PRODUCT NUMBER	UPC	PRODUCT DESCRIPTION	SUGGESTED RETAIL PRICE (SRP)
16664	018208166640	PROSTAFF 1000	\$169.95

Technical Information,
Service & Repair
1-800-NIKON US

Nikon Service & Repair Center
6420 Wilshire Blvd., Suite 100
Los Angeles, CA 90048-5501

All Nikon Trademarks are the property of Nikon Corporation. Features and specifications are subject to change without notice.



PROSTAFF 1000 i

LASER RANGEFINDER

NEW FOR 2019

**ACCURACY AT
VIRTUALLY ANY ANGLE**

NEW PROSTAFF 1000i



MULTILAYER COATING
Multilayer coating is applied to one or more lens and prism surfaces.



LONG EYE RELIEF
Provides 15mm or more of eye relief. Perfect for eyeglass wearers.



ID TECHNOLOGY
Delivers the one number you need for your best shot to account for incline or decline shooting angles.



TRU TARGET
Technology that allows you to switch between First Target and Distant Target modes.

- HIGH QUALITY 6X MONOCULAR
- AUTOMATIC CONTINUOUS MEASUREMENT FOR UP TO FOUR SECONDS IF SINGLE MEASUREMENT FAILS
- PRESS AND HOLD DOWN THE POWER BUTTON TO ACTIVATE THE CONTINUOUS MEASUREMENT FUNCTION (UP TO APPROXIMATELY EIGHT SECONDS)
- COMPACT SIZE FITS IN POCKET
- RAINPROOF—JIS/IEC PROTECTION CLASS 4 (IPX4) EQUIVALENT


ACCURACY AT VIRTUALLY ANY ANGLE

The PROSTAFF 1000i 6x20 Laser Rangefinder features ID (Incline/Decline) Technology—with a Horizontal Distance / Actual Distance display mode that can be easily switched depending upon your preference. With a solid 1,000-yard maximum ranging capability that fits into the hand, together with compact ergonomics that fit your pocket, the PROSTAFF 1000i is perfect for rifle or bow hunting. A 6x optical system makes seeing—and ranging—deer out to 600 yards a reality, while the Tru-Target system allows you to select either First Target or Distant Target Priority. Weather resistant/ rainproof construction.

TRU-TARGET TECHNOLOGY ENABLES YOU TO CHOOSE BETWEEN TWO DIFFERENT RANGING MODES, DEPENDING ON THE SITUATION.




First Target Priority Mode provides the exact distance to the closest object among a group of targets being measured. In this mode, you can easily range an object as small as a fence post.



Distant Target Priority Mode displays the range of the farthest target among a group of targets measured. This feature is especially useful if the subject is located behind tall grass or brush.

ID [INCLINE/DECLINE] TECHNOLOGY

Nikon's advanced ID [Incline/Decline] Technology provides the horizontal distance to the target, even when ranging at various incline or decline shooting angles—up to an incredible +/- 89 degrees [nearly vertical up or down].

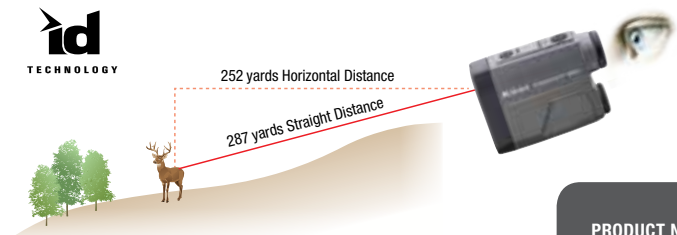

SPECIFICATIONS

PRODUCT NUMBER	16663
MAG. X OBJ. DIAMETER	6x20
EYE RELIEF (mm)	16.7
REAL ANGULAR FOV / FOV @ 100 YDS (FT)	6.0° / 31.4
MEASUREMENT RANGE* (YDS)	6-1,000
MAX RANGE (REFLECTIVE)* (YDS)	1,000
MAX RANGE (TREE)* (YDS)	800
MAX RANGE (DEER)* (YDS)	600
WEIGHT (W/O BATTERIES) (OZ)	4.6
SIZE (LxHxW) (IN)	3.6 x 2.9 x 1.5
INCREMENT READING (YDS)	1.0
EXIT PUPIL (MM)	3.3
DIOPTER ADJUSTMENT	±4 m-1
POWER SOURCE	1 CR2 LITHIUM
ACCURACY** (actual distance in yds)	±1.00m/yd. (shorter than 100m/yd.) ±2.00m/yd. (100m/yd. and over)
VIEWFINDER DISPLAY	m/YD
LASER CLASSIFICATION	IEC60825-1: Class 1M/Laser Product FDA/21 CFR Part 1040.10:Class 1 Laser Product
ELECTROMAGNETIC COMPATIBILITY	FCC Part15 SubPartB class B, EU:EMC directive, ICES-003
ENVIRONMENT	RoHS, WEEE

* Under Nikon's measurement conditions and reference value.

**Under Nikon's measurement conditions.

The specifications of the product may not be achieved depending on the target object's shape, surface texture and nature, and/or weather conditions.



5-YEAR RANGEFINDER LIMITED WARRANTY:
If any Nikon rangefinder is found to have defects in workmanship or materials, we will, at our option, repair or replace it at no charge for a period of 5 years from date of purchase. Please see warranty card for limitations and exclusions.

For details, visit NikonSportOptics.com.

PRODUCT NUMBER	UPC	PRODUCT DESCRIPTION	SUGGESTED RETAIL PRICE (SRP)
16663	018208166633	PROSTAFF 1000i	\$199.95

Technical Information,
Service & Repair
1-800-NIKON US

Nikon Service & Repair Center
6420 Wilshire Blvd., Suite 100
Los Angeles, CA 90048-5501

All Nikon Trademarks are the property of Nikon Corporation. Features and specifications are subject to change without notice.